

	達鎮國際有限公司 Reach Quality International Co., Ltd 23857 新北市樹林區八德街 251 巷 5 號 14 樓 14F, No.5, Ln. 251, Bade St., Shulin Dist., New Taipei City 23857, Taiwan (R.O.C.) TEL : +886-2-86857980、FAX : +886-2-86857961	V : 2.0
		2020/02/10
		LMR-12-RXXX-XX-1201X



特色-Feature

- 1、LED模組使用鋁基板信賴性高 \ LED module using aluminum plate high reliability
- 2、LED使用Nichia封裝體，產品可銷售全球 \ Use Nichia LED packaging, the products can be sold worldwide
- 3、啟動時間短、不閃頻 \ Start time is short, do not Flash frequency
- 4、色溫符合能源之星 \ Color temperature in accordance with ENERGY STAR
- 5、環保、安全、無污染 \ Environmental protection, safety, pollution-free
- 6、亮度比傳統鹵亮 \ Brightness brighter than traditional halogen
- 7、符合傳統燈具安裝規格 \ Consistent with the traditional lighting installation specifications

規格-Power Specification

標誌-Symbol	特性-Characteristics	條件-Condition	備註-Remark
輸入-Input	電壓-Voltage	AC 100~264V	
	頻率-Frequency Range	50~60 Hz	
	效率-Efficiency	>80%	
	瓦數-Power	12W±10%	
輸出-Output	電壓-Voltage	DC 18~40V	
	電流-Current	DC 300mA	
環境溫度\ Environment temperature	儲存溫度-Storage Temperature	-20~+60°C	
	操作溫度-Operating Temperature	-20~+40°C	
	操作環境-Operating Environment	Indoor Only	

	達鎮國際有限公司 Reach Quality International Co., Ltd 23857 新北市樹林區八德街 251 巷 5 號 14 樓 14F, No.5, Ln. 251, Bade St., Shulin Dist., New Taipei City 23857, Taiwan (R.O.C.) TEL : +886-2-86857980、FAX : +886-2-86857961	V : 2.0
		2020/02/10
		LMR-12-RXXX-XX-1201X

光學規格-Opticso Specification

模式-Model	正白-CW	自然白-NW	暖白-WW
色溫-Color Temperature	5700K (5665K±355)	4000K (3985K±275)	2700K (2725K±145) 3000K (3045K±283)
光通量-Lumen	1500±10% Lm	1400±10% Lm	1100±10% Lm 1300±10% Lm
角度-Angle	15°、18°、30°、45°、60°		
顯色性-CRI	>80	>80	>80
壽命-MTBF	25000H		

註：日亞在每二季會提升亮度10~15%數據以上面更新為主。下面實試數據不會每次規格提升都會做測試
 Nichia second quarter will increase in brightness every 10 to 15% of the data to update the above based.
 The following data is not always the real test will be done to improve test specifications

機構規格-Organization Specification

項目-Item	規格- Specification	備註-Remark
接頭-Port Specification	空接pitch 2.5、2P、紅黑10mm	
尺寸-Size	Φ50x81mm	未含電源
光源數量-Led Pcs	12 PCS LED	
材質- Material	AL、PC	
重量-Weight	72g	未含電源

產品編碼-Product Nomenclature

[LMR-12-RXXX-XX-1201X](#)

1 2 3 4 5 6 7 8 9

1=光源種類-Type of light source : LED

2=燈具規格-Lamp specifications : AR111、MR16

3=瓦數消耗-Wattage consumption : 12

4=顯色指數-CRI : 7、8、9

5=色溫K數-Number k of color temperature : 50、40、30、27

6=燈具角度-Lighting angle : 18°、30°、45°、60°

7=LED燈數-LED quantity : 12

7=流水號-Serial number : 01

8=電源燈具有無-Power Lighting presence. : N、P



達鎮國際有限公司
 Reach Quality International Co., Ltd
 23857 新北市樹林區八德街 251 巷 5 號 14 樓
 14F, No.5, Ln. 251, Bade St., Shulin Dist., New Taipei
 City 23857, Taiwan (R.O.C.)
 TEL : +886-2-86857980、FAX : +886-2-86857961

V : 2.0


2020/02/10

LMR-12-RXXX-XX-1201X


測試資料-Test Date

配光數據，穩態1H所測試的亮度

/ The brightness of the light distribution data, the steady-state 1H tested

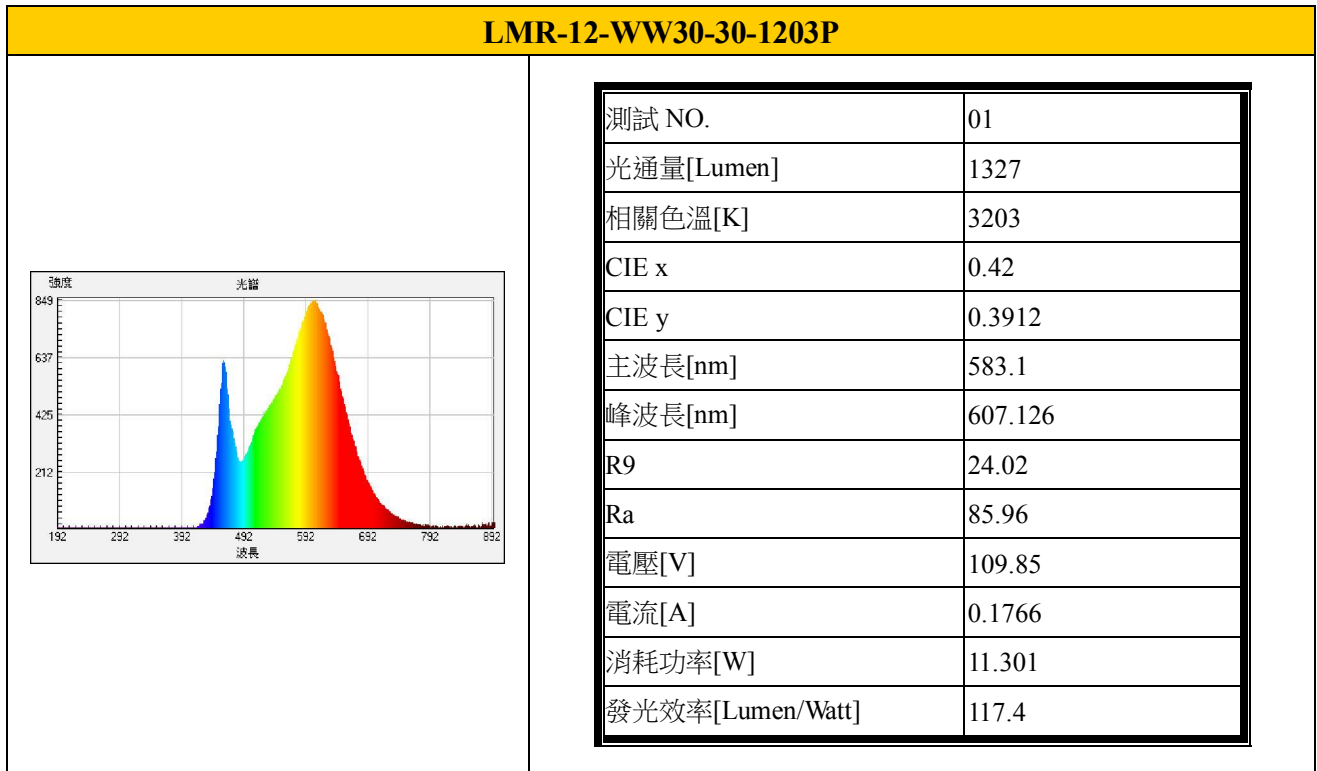

光型照度-Candela Distribution

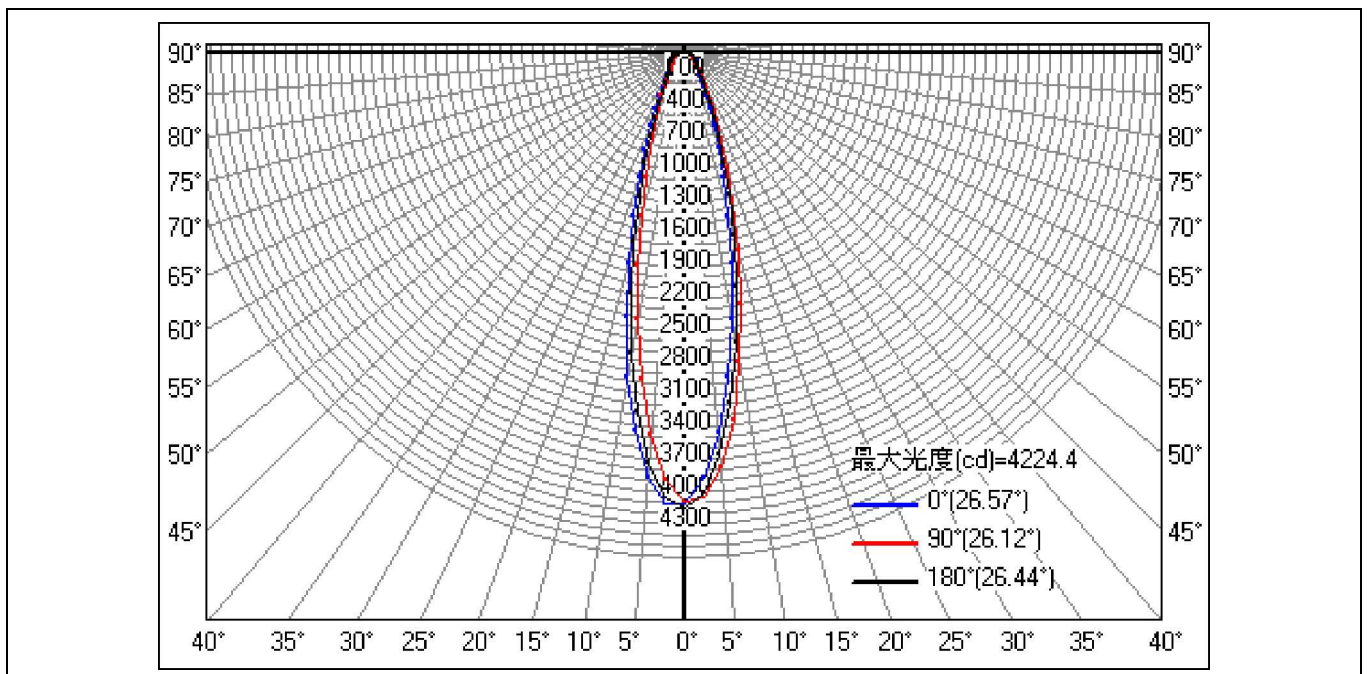




達鎮國際有限公司
 Reach Quality International Co., Ltd
 23857 新北市樹林區八德街 251 巷 5 號 14 樓
 14F, No.5, Ln. 251, Bade St., Shulin Dist., New Taipei
 City 23857, Taiwan (R.O.C.)
 TEL : +886-2-86857980、FAX : +886-2-86857961

V : 2.0

2020/02/10

LMR-12-RXXX-XX-1201X

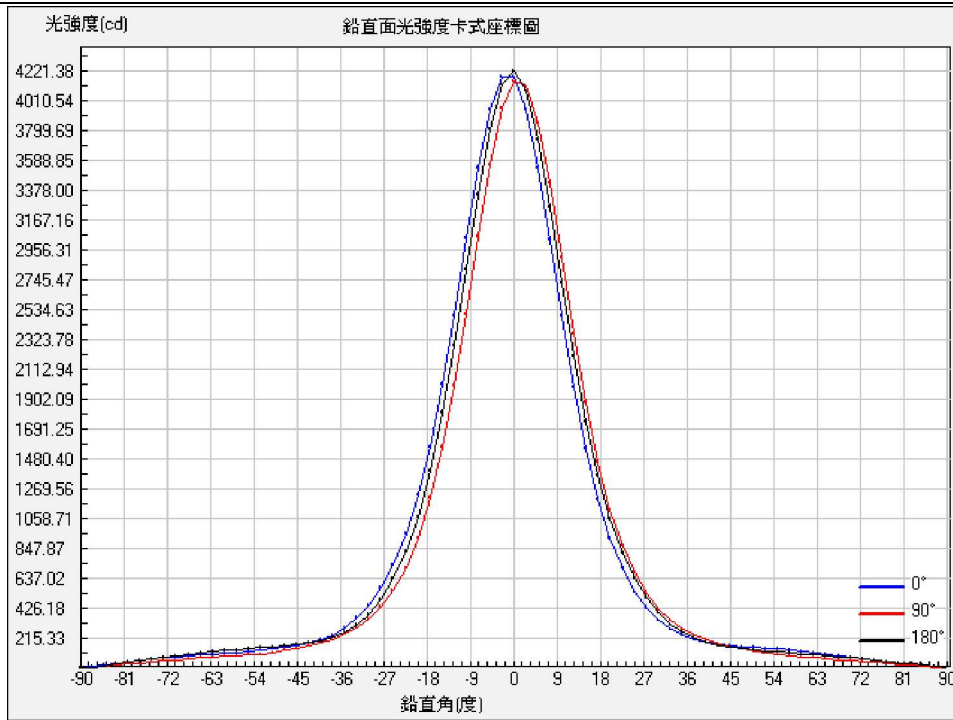

Lux at a Distance

1 m	4150 lx	46 cm	47 cm
2 m	1038 lx	93 cm	95 cm
3 m	461 lx	139 cm	142 cm
4 m	259 lx	186 cm	189 cm
5 m	166 lx	232 cm	236 cm
6 m	115 lx	278 cm	284 cm
7 m	85 lx	325 cm	331 cm
8 m	65 lx	371 cm	378 cm
9 m	51 lx	418 cm	425 cm
10 m	42 lx	464 cm	473 cm

Vert. Spread: 26.1 deg.

Horiz. Spread: 26.6 deg.

